



GeM
Government
e Marketplace

promark[®]
MARK OF PROFICIENCY

PRO WLS-25

OMNIDIRECTIONAL SPEAKERPHONE

Connect, communicate, and collaborate with Promark
Wireless Speakerphones



Support Duplex
Call



12m Voice
Pickup - Dual
Microphone



5400 mah
Battery



Bluetooth
5.0

www.promark.co.in

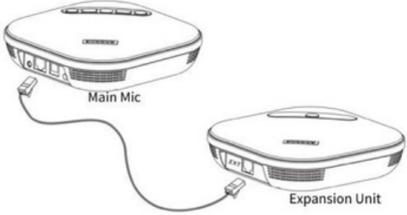
Product Images may differ in appearance from the actual product.

Product Specification

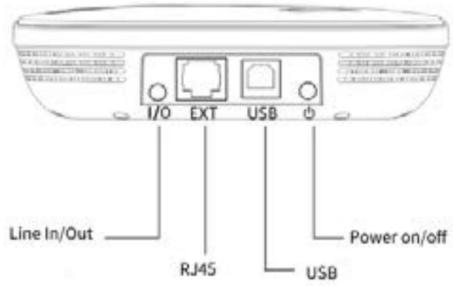

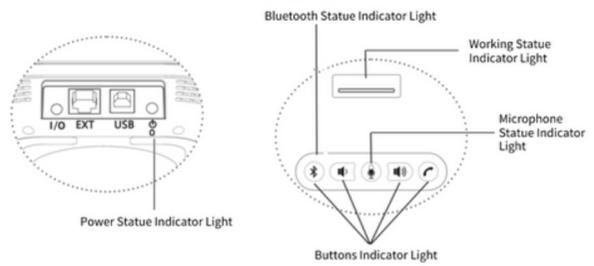
Module	Funtions	Description
Audio Technology Parameter	Acoustic Echo Cancellation (AEC)	Full-duplex echo cancellation depth can reach more than 65dB
	Echo Length	≥500ms
	Two way noise compression (NC)	Noise compression below 25dB
	Smart microphone automatic direction finding technology (EMI)	Support
	Automatic gain control (AGC)	Support
Voice Frequency Parameter	Microphone frequency response	100Hz to 22KHz
	Horn frequency response	100Hz to 22KHz
	Pick up range	12M, 360° (when dual used)
	Speaker volume	Maximum 85bB
	Speaker Power	3W
Power Supply	Built in battery	Built-in 5400mA Battery, working duration is more than 10 hours. Standby time 90 days
Main Microphone Interface	Line In/out interface	3.5mm audio input/output interface
	RJ45 network port	Connect to expansion microphone
	USB	Type-B audio input/output interface
	Power Switch	Press for 3 seconds to turn off the device
Expansion Microphone Interface	RJ45 network port	Connect to main microphone
Other	USB	Able to connect with USB to supply power
	Noise Level	< 48 Dba

Product Specification

Module	Support System	Windows/Android/ios/Linux
Audio Technology Parameter	Power Supply	AC 100~240V, 50-60HZ, 12w
	Operation Temperature	0°~ 50°c (Operational Statue)
Others	Standard Accessory	USB cable/cascade cable/instruction manual/certificate/ warranty card
	Optional Accessory	USB Bluetooth Adapter

Audio technical parameters	 <p>(The button silk screen is on pending, subject to the final output ID)</p>	
Audio technical parameters	Acoustic echo cancellation (AEC)	Full-duplex echo cancellation depth can reach more than 65DB
	Echo length	≥500MS
	Two-way noise compression (NC)	Noise compression reaches 18DB
	Automatic Direction finding Technology of Intelligent microphone (EMI)	Support
	Automatic gain control technology (AGC)	Support
Audio parameter	Microphone Frequency Response	100HZ-22KHZ
	Speaker Frequency Response	100HZ-22KHZ
	Pickup range	5M, 360°
	Speaker volume	Maximum: 85DB

Product Specification

Interface	Main Microphone		
		Line in/out	3.5MM audio in/out interface
		RJ45 network port	Connect with extended microphone
		USB Interface	TYPE-B audio in/out interface
	Power switch	Long press 3S to open the device	
	Extended Microphone		
		RJ45 network port	Connected with main microphone
	Button description	Button silk screen	
Button silk screen			decrease/increase volume
Bluetooth button			Turn on/off Bluetooth
Off/on hook button			Off-hook/on-hook (off-hook enter or exit calling statue when there is a skype for business call.)
Microphone mute button			Turn on/off microphon
Indicator			

Product Specification

Indicator	Bluetooth status indicator	Blue light flashing	Bluetooth pairing status
		Blue light is on	Bluetooth is connected
	Microphone status indicator	Red light is on	Mute the microphone
		green light is always on	The microphone is working
	Working status indicator	Red light is on	Mute the microphone
		green light is always on	The microphone is working
	Power status indicator	Red light is on	The battery is low and must be charged
		Flashing green	Charging
		green light is always on	The battery is fully charged
Bluetooth	Support		
Power supply	Built-in battery	Built-in 5200mA battery , working duration is more than 8 hours. Standby time 90 days	
	USB	Able to connect with USB	



360° Voice Pick Up: Omnidirectional sensitive microphone can capture every tiny sound to make them more clear no matter where it is from



High-power Speaker: As Built-in high-fidelity and high-power speakers, the voice from Pro WLS-25 is continue and undistorted.



Full Duplex Technology: Featured with full duple deep echo cancellation, 48 k voice calling over broadband technology, microphone smart, mix, dynamic noise reduction, and automatic gain technology



Support Bluetooth, USB, Line IN/OUT Interface: Support Line IN/OUT stimulate interface to connect with an external communication terminal with a 3.5 mm audio cable. It also supports multi-media communication systems and network meeting platforms.

PROMARK TECHSOLUTIONS PRIVATE LIMITED

CORPORATE OFFICE:
Plot No. F-22, Phase 8, Industrial Area,
Mohali Punjab- 160055

REGD. OFFICE (WORKS):
Ludhiana Highway (NH-95) Morinda By-Pass,
Village Madouli, Morinda, Distt. Ropar Punjab-140413

DELHI OFFICE:
A-14, GF, Okhla Industrial
Area, Phase-2, New Delhi 110020

Branch Offices: Jammu and Kashmir, Chandigarh, Himachal Pradesh, Uttarakhand Haryana, Delhi, Rajasthan, UP-Lucknow & Bareilly, Bihar, Jharkhand, North East, Chhattisgarh, and Kolkata.

For any inquiries
contact us at:

www.promark.co.in



sales@promark.co.in



1800 103 8878